

Pitch: 1.27mm(0.05")

Female Header Single Row Straight Dip Type

FEA1XX Series

Technical Data

Material:






Contact Material: Phosphor Bronze
 Insulator Material: Black Polyester UL94V-0
 Standard: PA6T+30%G.F

Electrical:

Current rating: 1.0Amps/contact max.
 Contact resistance: $\leq 20m\Omega$ /contact
 Insulation resistance: $\geq 1000M\Omega$ at V=100V
 Withstanding Voltage: 300V AC/minute

Mechanical:

Operating temperatures: Gold Plated: -55° C to +105° C
 Tin plated: -40° C to +105° C
 Soldering temperature: +260° C, 10s max.

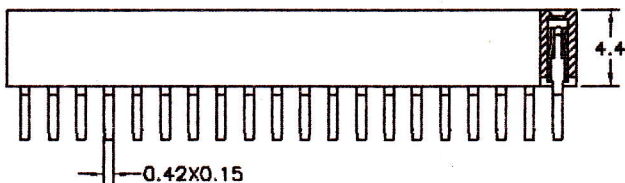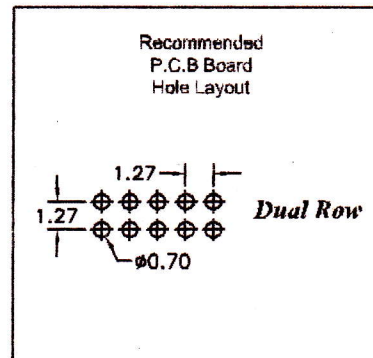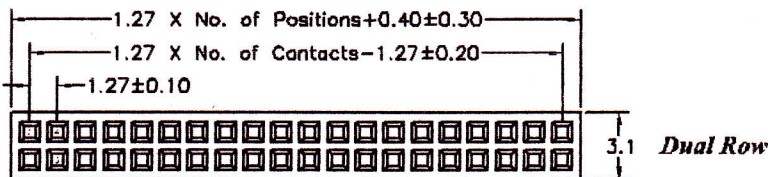

Dual Row

FEA	2	44	0 - U	20	A	C	A	XX
Row Option 2 Dual Row	High Option 44 H=4.4mm	No. of Positions Per Row 20pos	Plating Option A G/F B Au3μ" C Au5μ" D Au10μ" E Au15μ" S Special	Insulator Material Option C BK-PA6T D BK-PA46 F BK-LCP S Special	Pin Length (A) 01 2.4mm 02 2.8mm			