

REVISION DATA		
ITEM	DESCRIPTION	DATE
1		
2		
3		
4		
5		



1.27*1.27mm (0.050" * 0.050") PIN HEADER, DUAL ROW, RIGHT ANGLE

H=2.00mm

SPECIFICATIONS

Current Rating: 1AMP
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstand Voltage: 500V AC/minute
 Operation Temperature: -40°C to +105°C

Contact: Brass
 plating: Au or Sn Over 50μ Ni
 Insulator: High Temperature Thermoplastic
 UL94V-0 Rated
 Standard: PA6T+30%CF

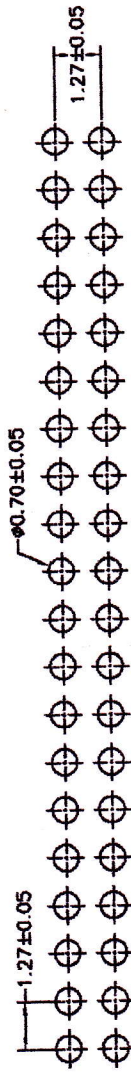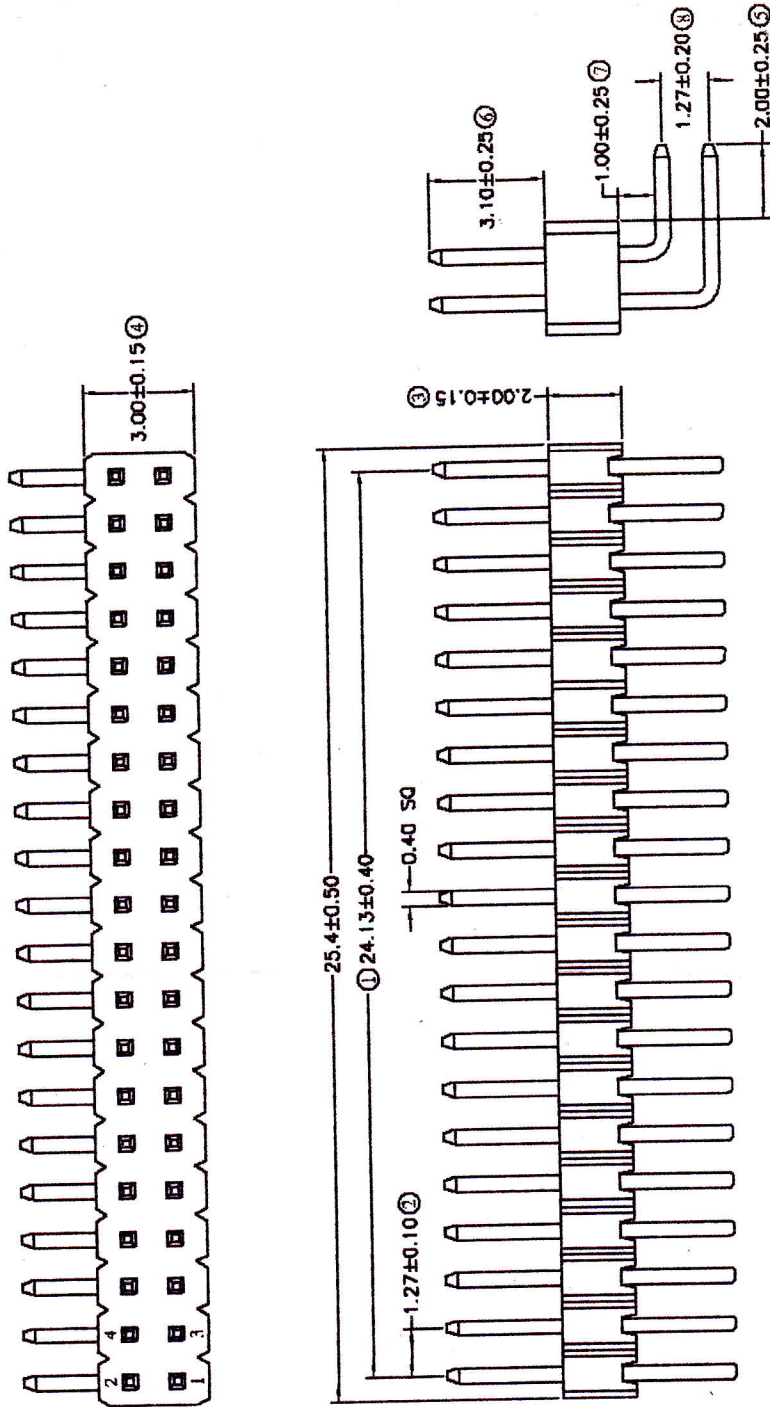

Recommended PCB Layout

绘图 (DRAWN)	冯晓燕	投影 (PROJECT)	公差 (TOLERANCE)	料号 (PART NO)	页次 (PAGE)
审核 (CHECKED)		单位 (UNIT)	0.0 ± 2°	PCR220-40G009003	
核准 (APPROVE)		比例 (SCALE)	0.0 ± 0.30	图号 (DRAW NO)	1/1
		版本 (EDITION)	0.00 ± 0.20	品名 (NAME)	
		日期 (DATE)	0.000 ± 0.10		
			2005.6.20		
					1.27双排针 90度 H=2.00 凹面弯