Pitch:2.00mm(0.0787")

Female Header Right Angle Dip Type FFBXXX Series

Technical Data

Material:
Contact material: Phosphor bronze
Insulator material:Black polyester UL94V-0
Standard:PBT+30%G.F

Electrical:
Current rating: 1.5Amps/contact max.
Contact resistance: ≤20mΩ/contact
Insulation resistance: ≥1000MΩ at V=100V
Withstanding voltage:450V AC/minute

Mechanical:
Operating temperatures: Gold plated:-55° C to+105° C
Tin plated:-40° C to+105° C
Soldering temperature: +220° C,10s max.



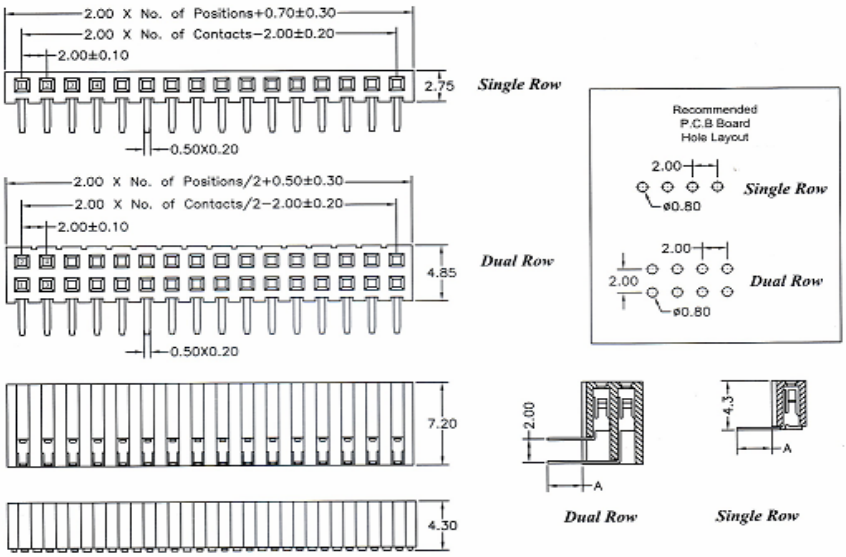

FFB	X	XX	0	-	U	XX	X	X	A	XX

Row Option		High Option		No. of Positions	Plating Option		Insulator Material Option		Pin Length (A)	
1	Single Row	43	H=4.3mm	02 to 40	A	G/F	A	BK-PBT	01	2.8mm
2	Dual Row	72	H=7.2mm	04 to 80	B	Au3μ"	B	BK-PA66	02	3.0mm
					C	Au5μ"	C	BK-PA6T		
					D	Au10μ"	D	BK-PA46		
					E	Au15μ"	F	BK-LCP		
					S	Special	S	Special		