






Beam
Angle
120°



FEATURES:

1. USING 24PCS **CREE-XPE** POWER LED AS LIGHTING SOURCE;
2. WITH E40 BASE, DIRECTLY REPLACE TRADITIONAL STREET LAMP BULB;
3. BEST USE OF LM OUTPUT;
4. LM OUTPUT OVER 2000LM;

NEW

35W



SPECIFICATION


NO	item	Parameter range	units
1	working environment	-20~40	°C
2	storage condition	-40~85	°C
3	work frequency	50/60	Hz
4	limited voltage	AC220	V
5	Input current	$165 \pm 10\%$	mA
6	output power	$35 \pm 10\%$	W
7	luminous flux	>2000	LM
8	Lux(3 meter distance) 3 meter distance in dark room.	≥ 120	Lux
9	Lux(5 meter distance) 5 meter distance in dark room.	≥ 45	Lux
10	Lux(6 meter distance) 6 meter distance in dark room.	≥ 35	Lux
11	Lux(8 meter distance) 8 meter distance in dark room.	≥ 20	Lux

• ELECTRICITY

- INPUT VOL:100V-240VAC
- INPUT/OUTPUT POWER:35W
- PF:0.85

OPTO PARAMETER

- LM OUTPUT:>2000Lm
- COLOR:6000K-7000K
- CRI:Ra=80
- LUX: >20Lux

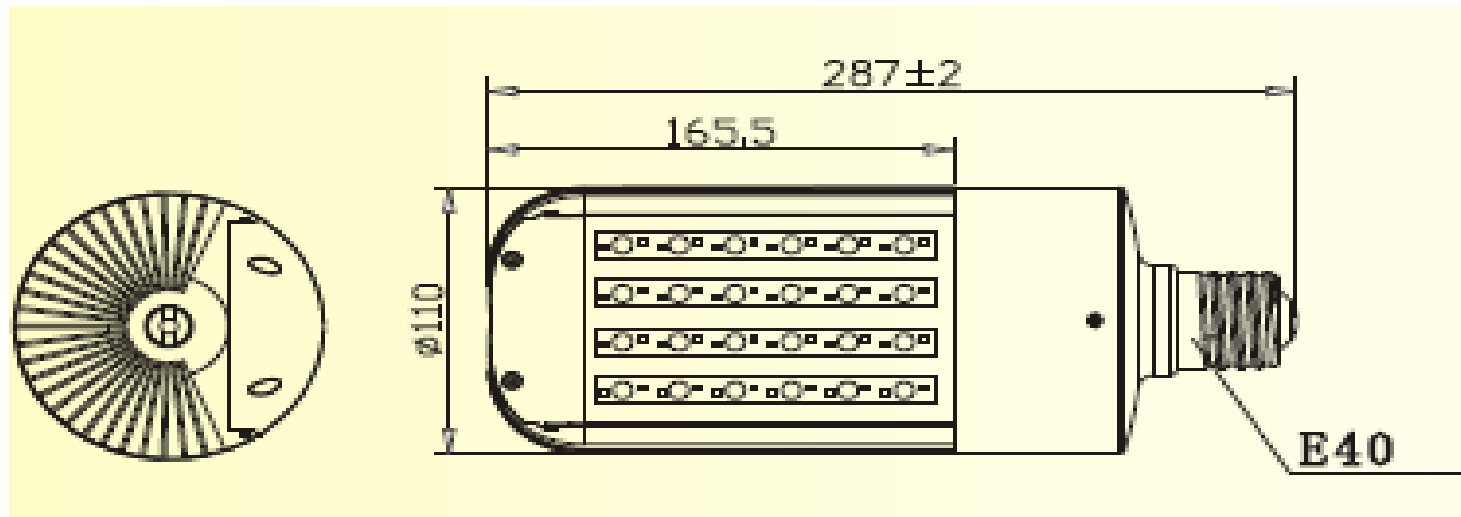

LAMP DIMENSION

- **APPLICATION**

CITY SUB-ROAD, GARDEN PAVEMENT, GAS STATION, PARK, FLAT YARD, ADVANCED COMMUNITY ETC...

