REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED

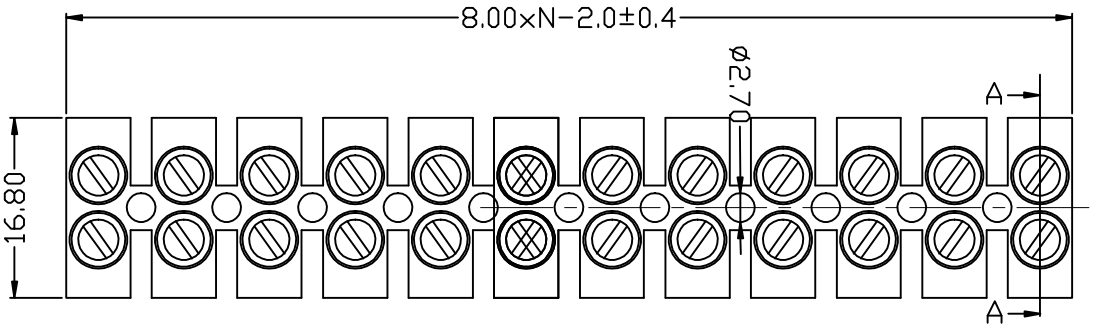



Wire Protector

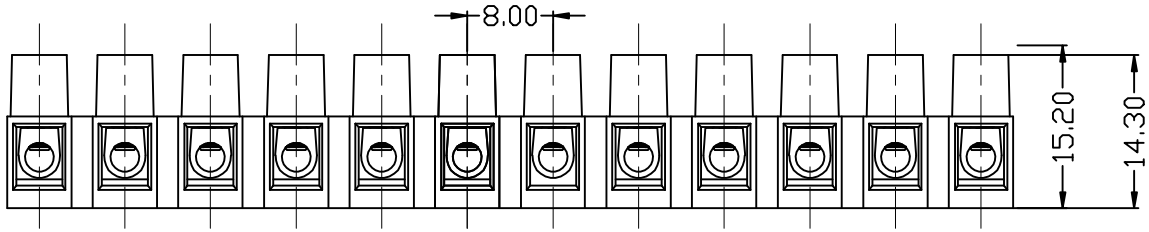

ELECTRICAL
Rated voltage:400V
Rated current: 32A
Wire range: 1.0...4.0mm²

MATERIAL
Screws: M2.5 steel Zinc plated
Base:With 1.2mm elevated base
Housing material PA66,UL94-2
Terminal block: Brass , Nickel plated

MECHANICAL
Working temperature:110℃

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.25	X.	±5°
.X	±0.15	.X	±3°
.XX	±0.10	.XX	±2°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	KF8H-XXX		

PROJECTION		TITLE	FEED THROUGH TERMINAL BLOCKS PITCH8.00MM
UNITS	mm		
SHEET SIZE	A4	SERIES	KF8HWP SERIES

KAIFENG ELECTRONIC
慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CO.LTD