

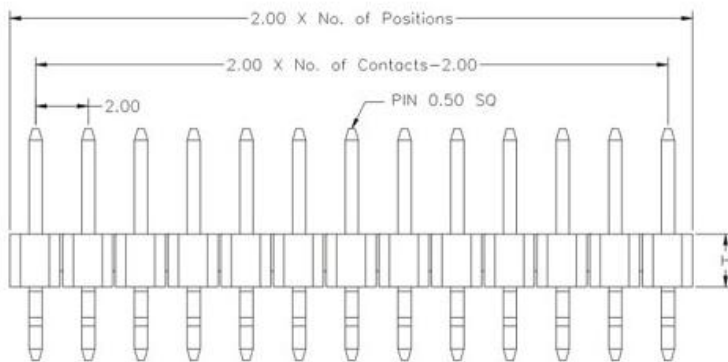


## 2.00mm Pin Header, Single Row, Right Angle, S.M.T

### SPECIFICATIONS

Current Rating : 1.5AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
                                   Standard: Nylon-66  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u" Ni



### PCB LAYOUT

#### Ordering Information

<b>1 2 20</b> — <b>1</b> Plastics Height 15=1.5mm 20=2.0mm	<b>1</b> <b>XX</b> No. of Pins Per Row 01~ 40	<b>G0</b> Contact Plating SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	<b>Z</b> <b>XXX</b> <b>01</b> Pin Length XXX=B+A+1.80 XXX=B+A+2.30
---	---	---	---